


NEOLINE 48 V SYSTEM

MINIMAL DIMENSIONS
PERFECT PROPORTIONS



LTS

GREAT SHOW

THE SLIM POWER TRACK SYSTEM

The new 48-volt track Neoline complements the comprehensive power track portfolio from LTS Licht & Leuchten GmbH. It is more delicate and discreet than all the previous track products from LTS. Neoline is unobtrusive and almost completely blends in with the background. The operating voltage of 48 volts allows for smaller and slimmer overall dimensions. When combined with the small ORYO 100 spotlight, Neoline is a stylish and upscale element in your retail and hospitality lighting concept. The distinctive and slim power track is particularly suitable for shop-in-shop solutions, smaller retail spaces, homely cafés, fancy boutiques, niches and corners that need extra highlighting, and for exclusive shop windows.






ON THE PULSE OF THE POWER TRACK

With a versatile range of connectors, the narrow power track can be adapted in length and shape to suit all given requirements. The track is available as a surface-mounted version and, with the respective accessories, as a pendant version.

SURFACE-MOUNTED-POWER TRACK


NEO-A 10/9500-1/ST6-E
Neoline surface-mounted power track
L=1000mm

■ 664240 □ 664241

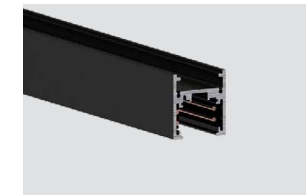



NEO-A 20/9500-2/ST6-E
Neoline surface-mounted power track
L=2000mm

■ 664242 □

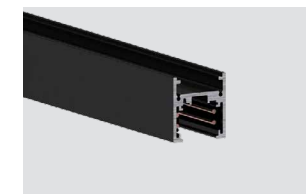


NEO-A 30/9500-3/ST6-E
Neoline surface-mounted power track
L=3000mm

■ 664244 □ 664245

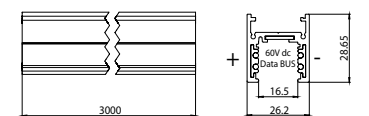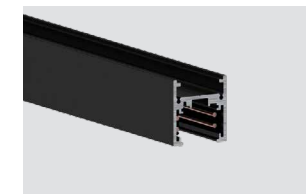

INTELLIGENT SYSTEM


Easy installation is guaranteed thanks to intelligently designed accessories. Die Stromschiene Neoline comes in white and black and is ideal for the realization of illumination settings with DALI.

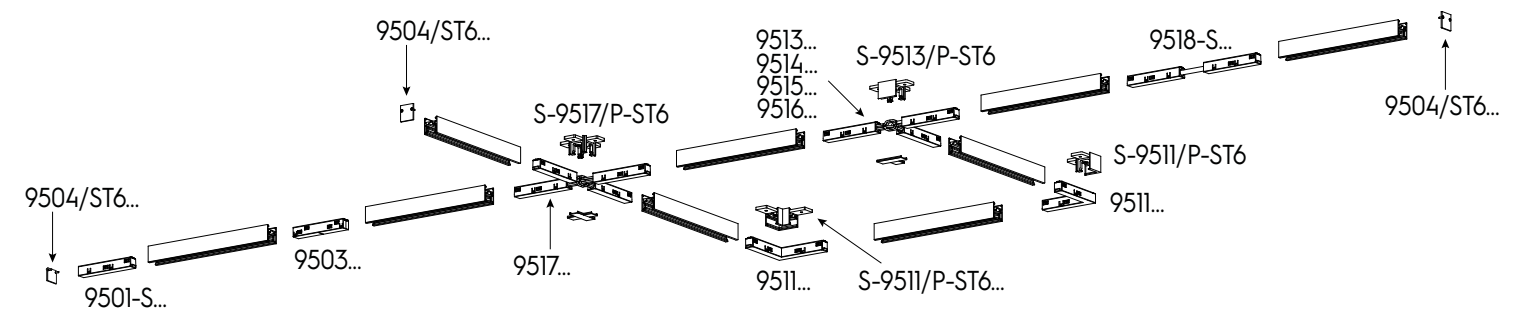

ELECTROMECHANICAL ACCESSORIES


NEO-A L/IN/9511-KI-E
Neoline surface-mounted L-connector
PE inside

665452 665453

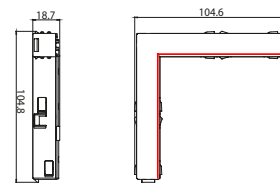



NEO-A L/OUT/9511-KE-E
Neoline surface-mounted L-connector
PE outside

665454 665455

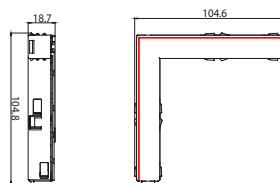



NEO-A T/S/S-9513/P-ST6
Neoline surface-mounted L-connector
mechanical for suspension

661372 661459

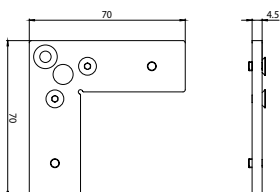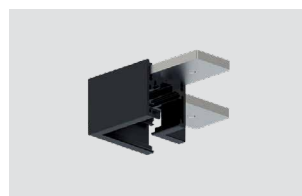


NEO-A T/S/S-9513/P-ST6
Neoline surface-mounted T-connector
mechanical for suspension

661372 661459

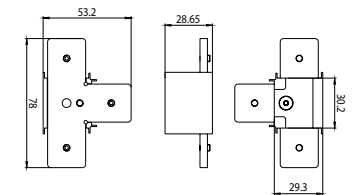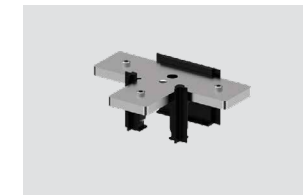



NEO-A T/PE-OUT-L/9513-K-E
Neoline surface-mounted T-connector
PE outside left

661372 661459

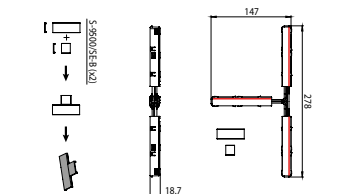

NEO-A T/PE-OUT-R/9514-K-E
Neoline surface-mounted T-connector
PE outside right



662559 662560

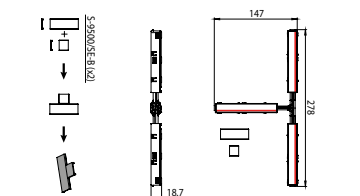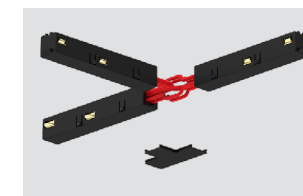

ELECTROMECHANICAL ACCESSORIES



NEO-A T/PE-IN-L/9515-K-E
Neoline surface-mounted T-connector
PE inside left

662613 662744

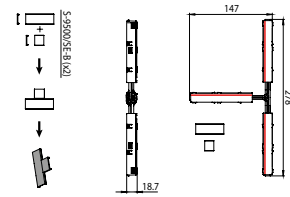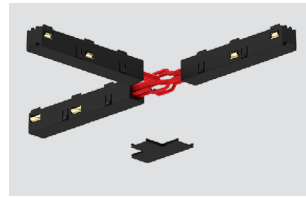



NEO-A T/PE-IN-R/9516-K-E
Neoline surface-mounted T-connector
PE inside right

662770 662771

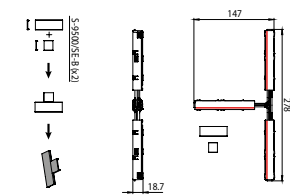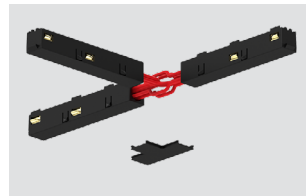



NEO-A X/S/S-9517/P-ST6
Neoline surface-mounted X-connector
mechanical for suspension

663314 663617

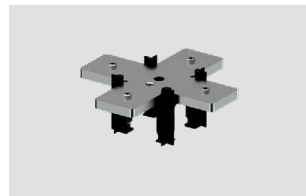



NEO-A X/9517-K-E
Neoline surface-mounted X-connector

663636 663637

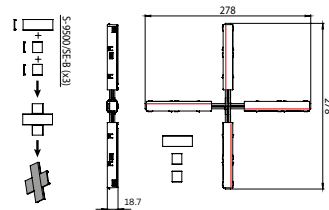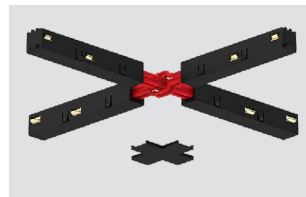



NEO-F/L/9501-S-KL-E
Neoline feeder
left

664263 664264



NEO-F/R/9501-S-KR-E
Neoline feeder
right

664265 664266

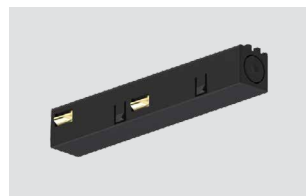


NEO-IE/9503-S-K-E
Neoline linear connector
electrical inside

664267 664268





NEO-A S/S-9500-114
Neoline ceiling bracket

664251 664252

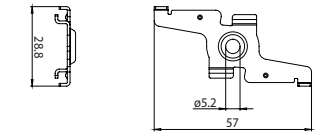


NEO-A S/S-9500/323-LA
Neoline linear connector
mechanic for suspension

664253

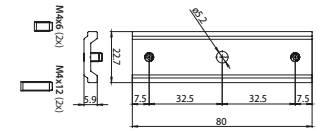



NEO-A S/9500-KIT1-3/3000
Neoline suspension set
L=3000MM

664250

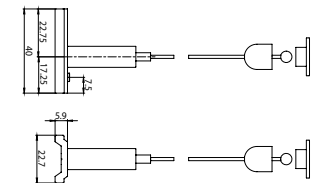



NEO-A CAP/9504/ST6
Neoline end cover

664246 664247

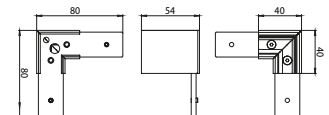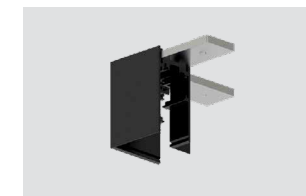

NEO-A CAP ESP/9504/ST6-F
Neoline end cover
with feeding opening



664248 664249

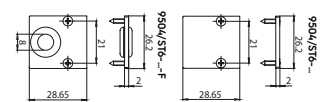

ELECTRICAL SUPPLY



NEO-Z PSA/9500/P-1000E-C1-N
Neoline power supply surface-mounted

663841 663842

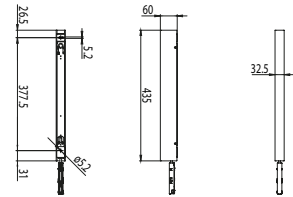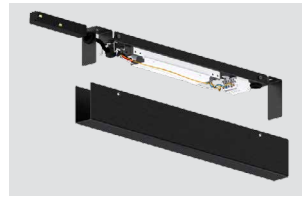


NEO-Z PSP/9500/P-1000E-SP-N
Neoline power supply suspension

663843 663844

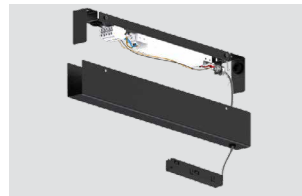



NEO-Z CONV 1X150
Neoline ballast housing
1X150W

665526 665527

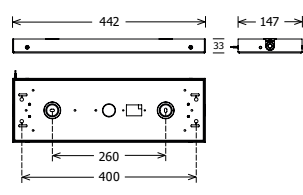



NEO-Z CONV 1X150/CAS
Neoline ballast housing
1X150W Casambi

665528 665529

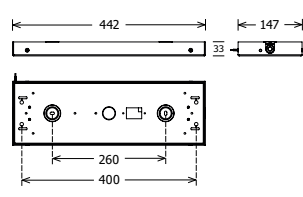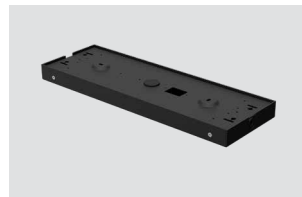



NEO-Z CONV 2X150
Neoline ballast housing
2X150W

665530 665531

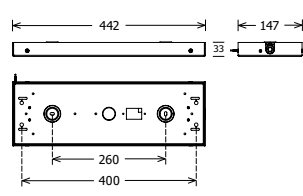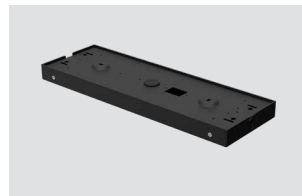

NEO-Z CONV 2X150/CAS
Neoline ballast housing
2X150W Casambi

665532 665533

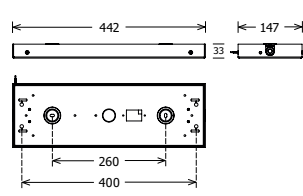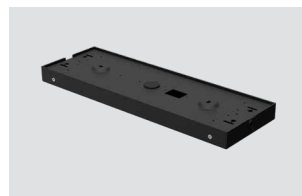

NEO-Z CONV/S/3000
Neoline wire-rope kit
for ballast housing (L=3M)

665534






NEOLINE AND ORYO

The delicate track system is the perfect companion for the compact LTS ORYO 100 spotlight. As an LTS product tandem, it provides for the most beautiful lighting scenarios in your projects. The uniform design of ORYO 100 with its elegant conical shape is harmonious and suits the slim Neoline in all retail and hospitality areas. Another feature ORYO 100 and Neoline have in common are the smaller and therefore also lighter and discreet-looking components. The ORYO series sets stylish accents with its tapered spotlight head and at the same time perfectly highlights the illuminated objects.




TRACK-MOUNTED SPOTLIGHT

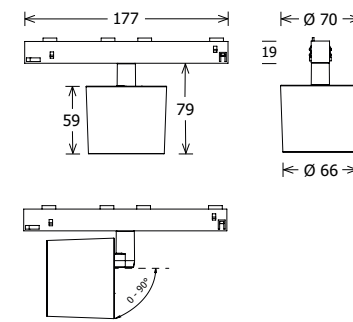

ORYO
track-mounted spotlight 100


COLOURS



SHIELDS



PENDANT VARIANT

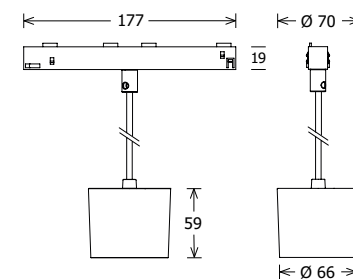

ORYO
track-mounted pendant spotlight 100



ORYO
track-mounted pendant spotlight 200

	ORYO 100	ORYO 200
COLOURS	black, white, silver, RAL*	black, white, silver, RAL*
DALI	Option	Option
BEAM ANGLE	15°, 25°, 45°	15°, 25°, 45°
SYSTEM POWER	18, 20, 20	30
LUMINOUS FLUX AT 4000K	1550 lm 1820 lm 1940 lm	3080 lm 3290 lm 3520 lm
CRI	90	90
EFFICIENCY AT 4000K	86 lm/W 91 lm/W 97 lm/W	102 lm/W 109 lm/W 117 lm/W
COLOUR TEMPERATURE	2700 K, 3000 K, 4000 K	2700 K, 3000 K, 4000 K
VARIANTS	track-mounted spotlight pendant variant	track-mounted spotlight pendant variant

The powerful little spotlight is available with beam angles of 15°, 25° and 45°, featuring a lumen output of ~2000 lm and a luminous flux of 4000 K. Its high performance and very good light pattern are very impressive. The LTS ORYO 100 spotlight can be fixed in the track and released again without tools.



A Fagerhult Group Company

LTS Licht & Leuchten GmbH
Waldesch 24
88069 Tett nang
Germany

T +49 7542 9307-0
info@lts-light.com
lts-light.com